User's Manual

USB PHONE SET

MODEL NO.: GT-USP450 (VERSION: 1.2)

Power Indicator: When the device is connected to PC and works properly, this indicator will lit.

Arrow Up(Volume): Pressing this key can tune up the receiver volume.

Arrow Down(Volume): Pressing this key can tune down the receiver volume.

Hang Up: Pressing this key to cancel or hang up your call.

Tab: Pressing this key to move cursor to the next column.

Dial: This key is used to dial out the number you keyed in. When the number you wanna dial out is still displayed on the dialing input box of your ITSP's application program, you can just hit this key to dial/redial the number.

Backward Delete: This key is used to change cursor position, pressing this key to backward cursor with deletion.

Hot Key@: This key is used to invoke/dismiss your ITSP's dialing application program, if you have installed your ITSP's dialing application program correctly.

Buzzer: No functionality in this model.

How to install & operate "IPCenter2" software:

- *Plug the modular plug into the RJ14 phone jack and other end of USB plug into the USB port of PC.*
- *WinXP will automatically detect the presence of a new USB device and install the necessary driver for USB Composite device.*
- *Create a new folder name in your PC. Insert our attached CD into your PC.*
- *Copy files inside of CD into the new created folder in your PC.*
- *Double-click file of "IPCenter2.exe" for auto-installation.*

1. Window shown on the screen after CD Insertion.

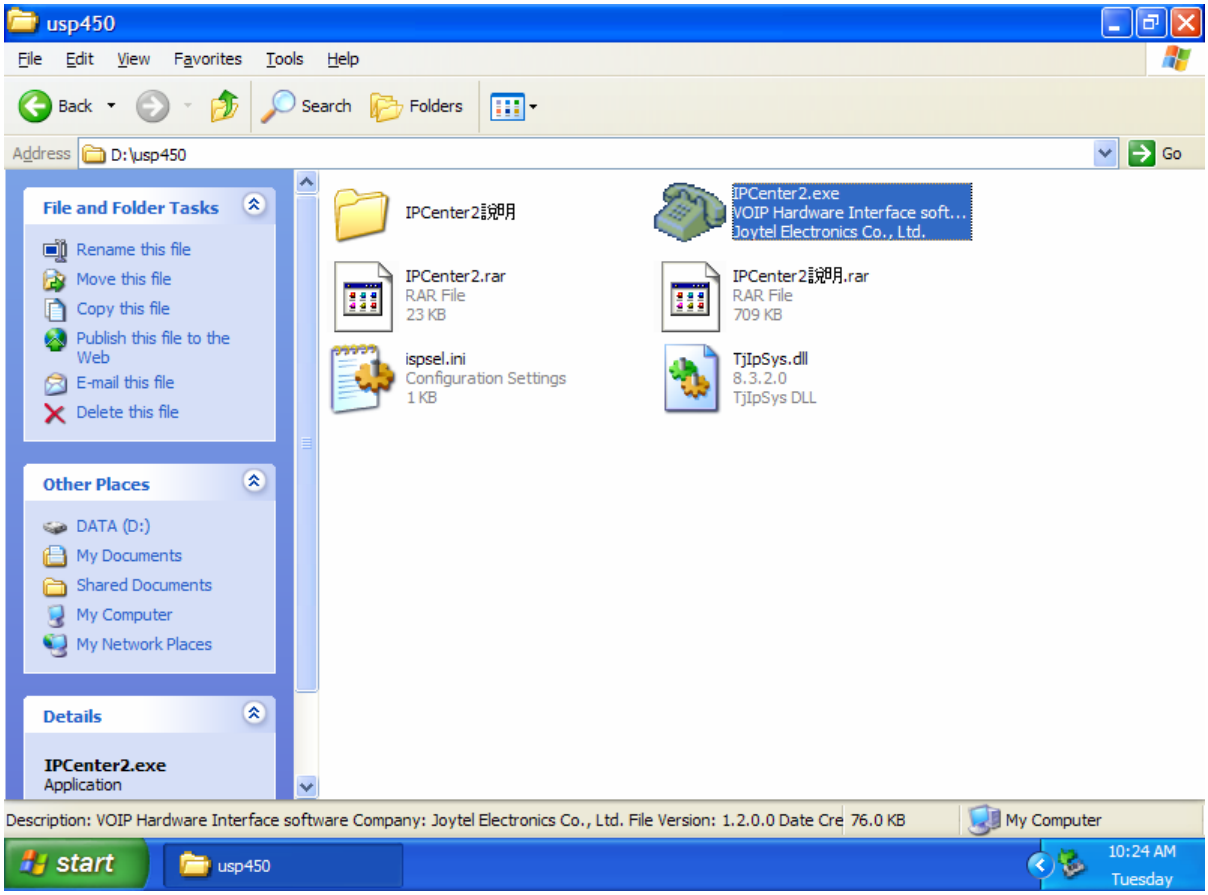

2. Window shown on the screen after double-click “IPCenter2.exe” file.

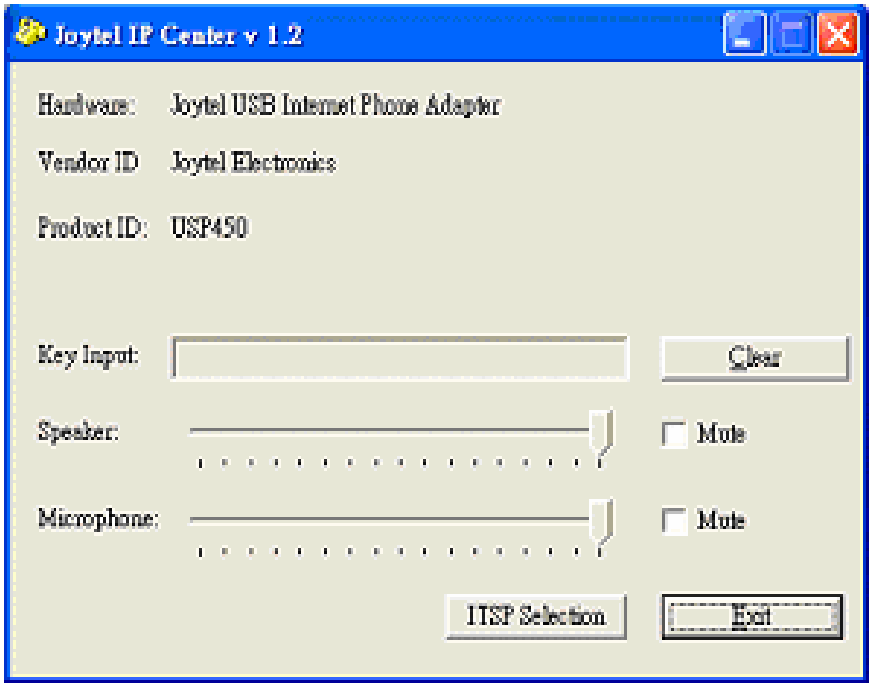

3. Click “ITSP Selection” :

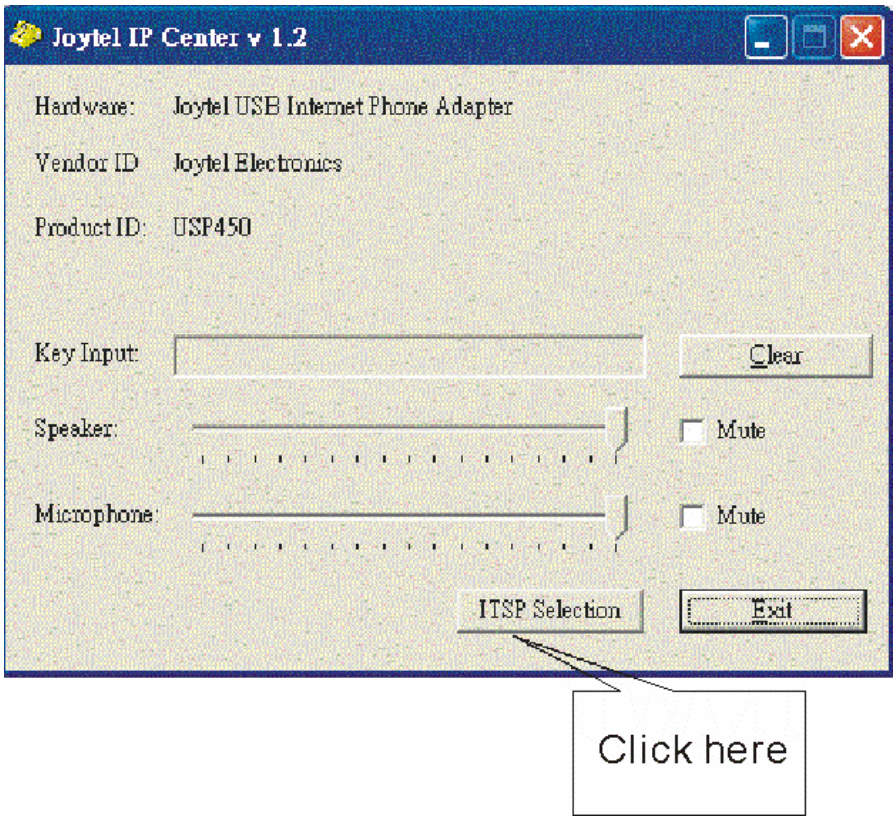

4. “ITSP Selection” window will be shown on the screen. There are some ITSP’S providers for your selection. Press “OK” button after you click the one of them from the list.

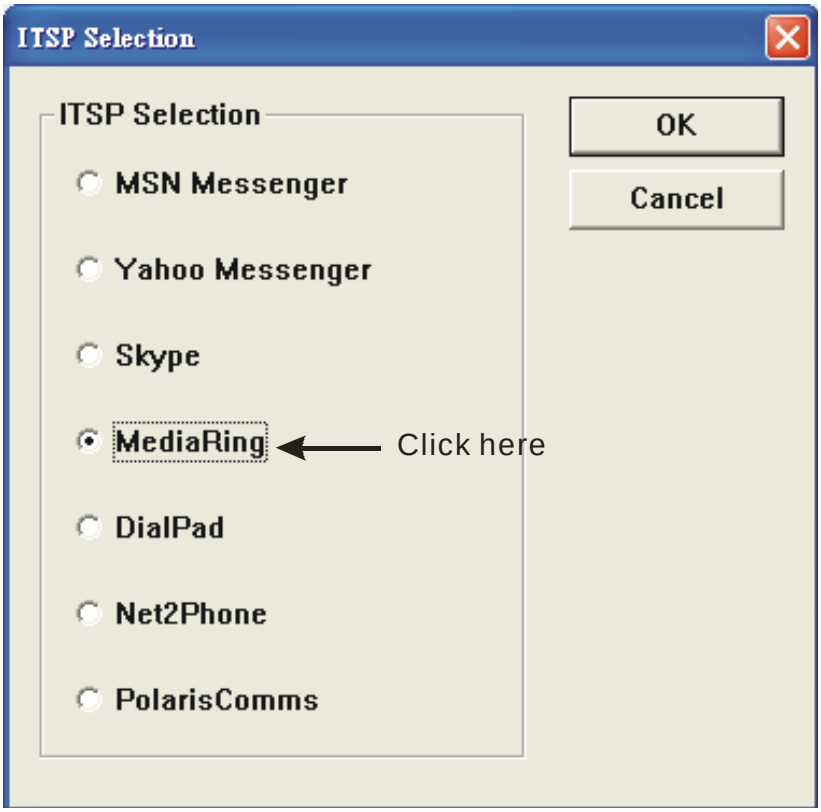

5. “MediaRing Talk” Window will be shown on the screen.

6. If you want to close the “MediaRing Talk” window, just pressing “Hot Key@” to terminate our software application.

7. If you want to make a call through “MediaRing” again, just pressing “Hot Key@” to enable our software application to be executed. “MediaRing Talk” window will be shown on the screen again.